

Rubber Metal antivibration mounts

ECCENTRIC BUSHINGS



In eccentric bushings the center points of the inner and outer cylinders are not the same. As a result it is more flexible in the direction of the main load and it keeps the same control in the other direction.

The eccentric bushing is available in two hardnesses, 45 and 60 sh.

TECHNICAL CHARACTERISTICS

- Optimal vibration damping and isolation.
- Fit to use for robust and safe constructions.
- Simple installation and application.
- Maximum load of bushing 45sh is about 300kg.
- Maximum load of bushing 60sh is about 460kg.

APPLICATIONS


The AMC MECANOCAUCHO® eccentric bushing is best suited to the following situations and applications:



Rubber Metal antivibration mounts

ECCENTRIC BUSHINGS

DRAWINGS

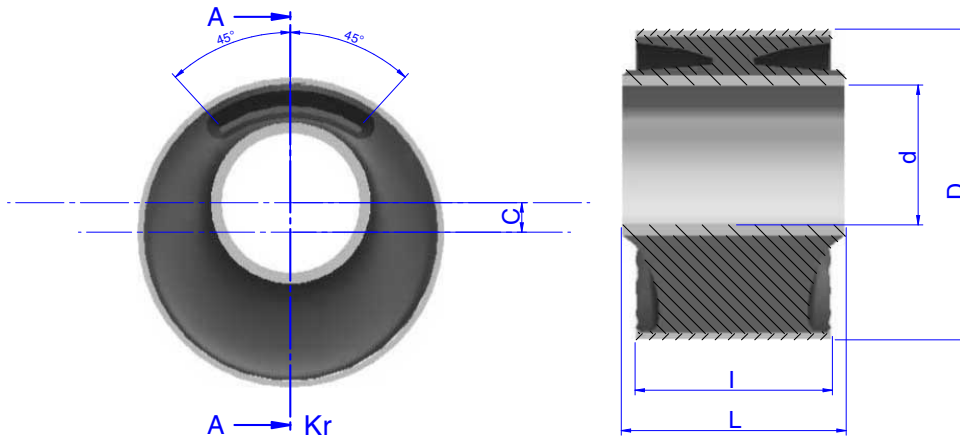


DIMENSIONS

Type	d (mm.)	C (mm.)	D (mm.)	I (mm.)	L (mm.)	Shore	Max. Load (kg.)	Code
MINI	16	7,1	47,6	50,8	63,5	45	110	154161
						60	180	154163

Rubber Metal antivibration mounts

ECCENTRIC BUSHINGS

DRAWINGS

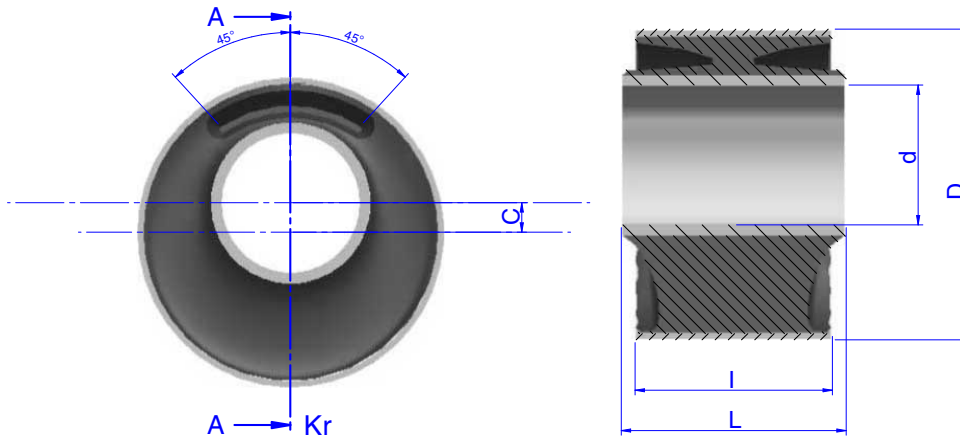


DIMENSIONS

Type	d (mm.)	C (mm.)	D (mm.)	I (mm.)	L (mm.)	Shore	Max. Load (kg.)	Code
SMALL	24	10,5	75,3	50,8	68	45	200	154159
						60	390	154158

Rubber Metal antivibration mounts

ECCENTRIC BUSHINGS

DRAWINGS

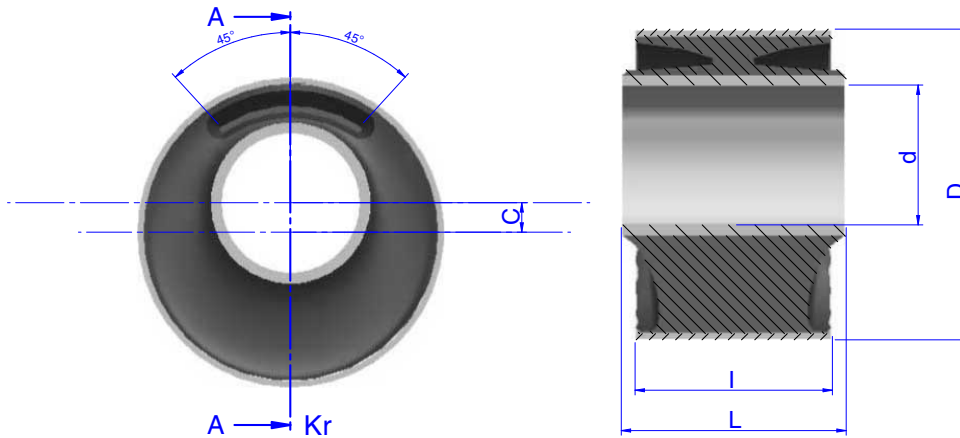


DIMENSIONS

Type	d (mm.)	C (mm.)	D (mm.)	I (mm.)	L (mm.)	Shore	Max. Load (kg.)	Code
LARGE	43,7	9,5	101,6	63,5	72,4	45	290	154154
						60	510	154155

Rubber Metal antivibration mounts **ECCENTRIC BUSHINGS**

DRAWINGS

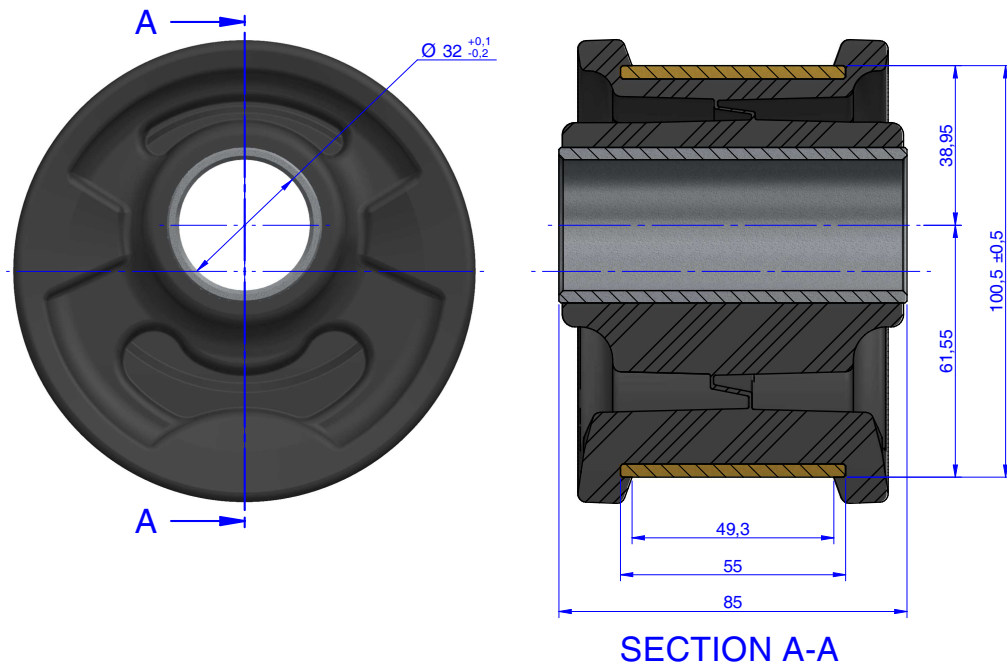


DIMENSIONS

Type	d (mm.)	C (mm.)	D (mm.)	I (mm.)	L (mm.)	Shore	Max. Load (kg.)	Code
100 HD	-	-	-	-	-	50	225	154181
						55	290	154182
						60	350	154183

Rubber Metal antivibration mounts

ECCENTRIC BUSHINGS

DRAWINGS

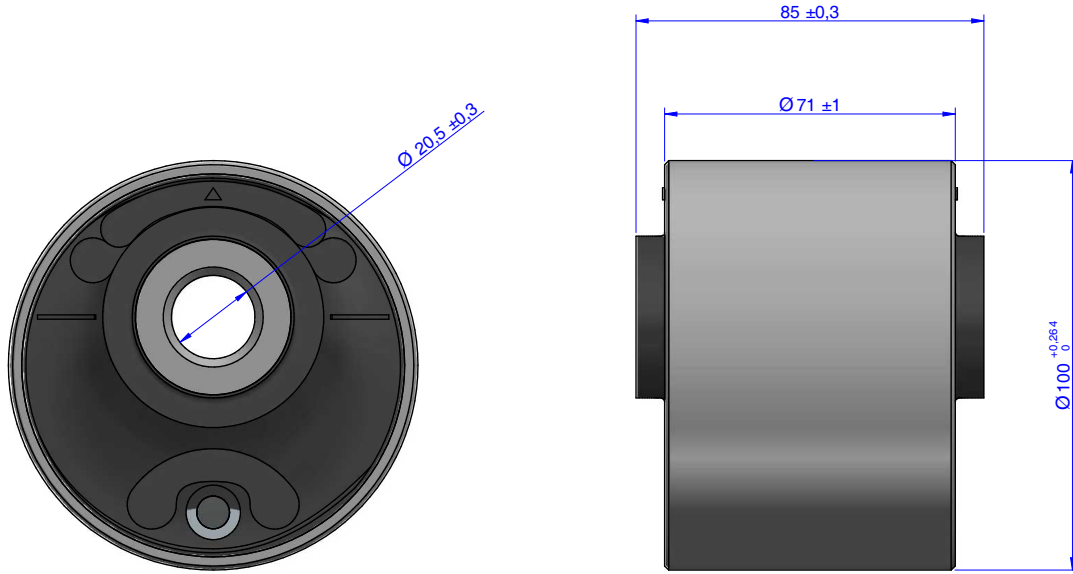

DIMENSIONS


Type	d (mm.)	C (mm.)	D (mm.)	I (mm.)	L (mm.)	Shore	Max. Load (kg.)	Code
100 RD	-	-	-	-	-	50	450	154175

Rubber Metal antivibration mounts

ECCENTRIC BUSHINGS

ELASTICAL PROPERTIES

AMC MECANOCAUCHO®
LOAD NATURAL FREQUENCY CURVE

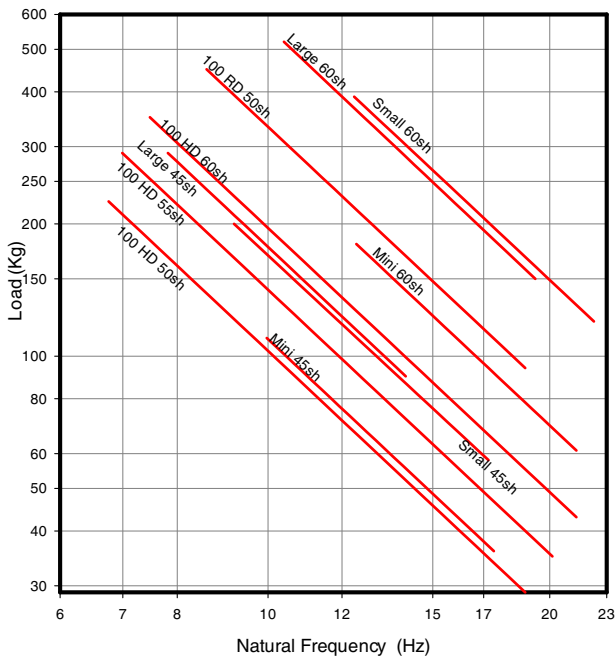

AMC MECANOCAUCHO®
LOAD DEFLECTION CURVE

