

## Rubber Metal antivibration mounts

# JT TYPE



The JT-type AMC Mecanocaucho® mounts are used in cases where light or heavy machines are not fixed to the floor or ground. The height adjustment system can be used to adjust the machines to the required level, thus insulating areas nearby from vibrations and reducing noise. The AMC-Mecanocaucho® type JT comes with a tilting system accomodating uneven surfaces.

### TECHNICAL CHARACTERISTICS

The elastomer used is a mixture of oil-resistant synthetic Nitrile Butadyene Rubber (NBR).

### APPLICATIONS


Levelling machine mounts



## Rubber Metal antivibration mounts

### JT TYPE

#### DRAWINGS

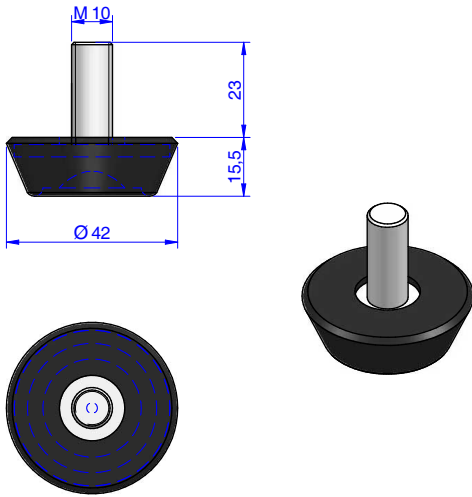

#### DIMENSIONS

Type	Load (kg.)	Weight (g.)	Shore	Code
JT Type	25-40	53	50	144001
	75-100	53	75	144002

## Rubber Metal antivibration mounts

# JT TYPE

### OPERATION AND ASSEMBLY



Height is adjusted by means of a screw, once the machine has been assembled. The wide contact between the base of the machine guarantees good overall stability.

Lift the machine and insert the mount under it. Insert and turn the screw manually until it can be wound into the thread in the mount . Adjust the height of the machine by turning the screw. When the machine is level , lock the mounts using the checknuts.