

## Rubber Metal antivibration mounts

# NP ANTI VIBRATION MOUNT



The AMC-MECANOCAUCHO® NP anti vibration mounts are composed of a metallic flange and a bush that are bonded to a high resilient rubber compound.

The AMC-MECANOCAUCHO® NP anti vibration mounts can be fitted with overload/rebound washers. This allows fail-safe installations. For this purpose we recommend using washer Ref. AMC: 608074 that has the following dimensions :76x16.5x5mm.

The flange comes with four fixing holes and the inner bush allows upto 120 N/mm tightening torque.

### TECHNICAL CHARACTERISTICS

AMC-MECANOCAUCHO® NP anti vibration mounts can be applied in mobile applications when installed with overload/rebound washers.

AMC-MECANOCAUCHO® NP anti vibration mounts are available in several rubber hardnesses to suit the p g g q load range of the application.

### APPLICATIONS

AMC-MECANOCAUCHO® NP anti vibration mounts are used for the effective noise and vibration isolation in the following applications:



- Agricultural equipment
- Construction equipment machinery
- Cranes
- Forklift trucks
- Multipurpose vehicles



## Rubber Metal antivibration mounts

# NP ANTI VIBRATION MOUNT

### DRAWINGS

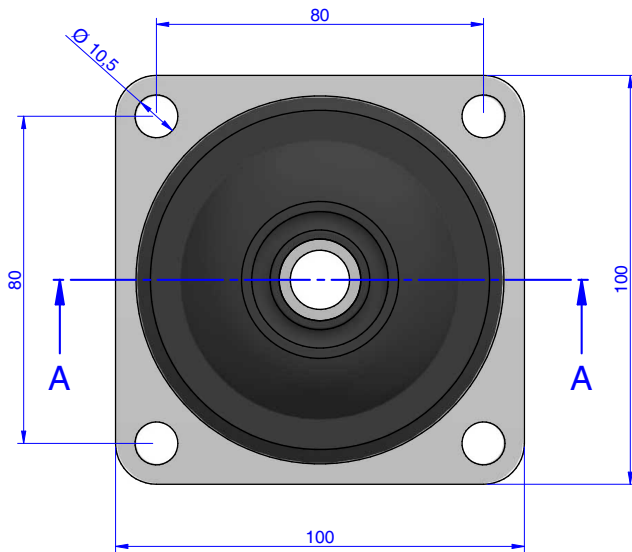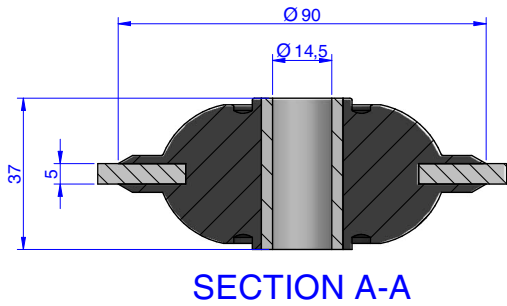

### DIMENSIONS

Type	Max. Load (kg.)	Code
50 Sh	250	138202
60 Sh	325	138201
70 Sh	400	138203

# Rubber Metal antivibration mounts

## NP ANTI VIBRATION MOUNT

### ELASTICAL PROPERTIES

