

Rubber Metal antivibration mounts

AMC MECANOCAUCHO® BOBBINS TYPE A



The AMC Mekanocaucho® Bobbins are devices for making elastic anchorings or fixings. They can be used in a wide variety of applications, particularly for elastic suspensions and antivibration isolation of machines and different mechanical organs. They are made of a block of rubber with two parallel metal parts at the end which enable it to be fixed either by screws in the "C" model or with nuts in the "A" model or a combination of both in the "B" model. The rubber block may be cylindrical in cases requiring greater load capacity or as a diabolo when greater elasticity is required in all directions.

TECHNICAL CHARACTERISTICS

Depending on the size of the rubber block, the AMC Mekanocaucho® bobbing has more or less elasticity, which is greater particularly in all directions perpendicular to its axis (shear). The AMC Mekanocaucho® bobbing thus makes it possible to make joints which permit major relative movements, up to several millimetres (in the case of heat expansion, chassis deformations, etc.). The AMC Mekanocaucho® bobbing serves very well for the vibration isolation of machines where the vibrations are perpendicular to their axis, unless these stresses are too much when applied in this direction.

APPLICATIONS


The AMC Mekanocaucho® bobbins are particularly suitable for installation on small motor-pumps, motor-ventilators, driers, sieves, compactors, washing machines, electrical motors, on-board control panels, measuring apparatuses, control cabinets, microphones, fluorescent tubes, etc.



Rubber Metal antivibration mounts

AMC MECANOCAUCHO® BOBBINS TYPE A

DRAWINGS




DIMENSIONS

Type	A (mm.)	B (mm.)	C (mm.)	H (mm.)	COMPRESSION LOAD Max. daN	COMPRESSION DEFLECT. Mm.	SHEAR LOAD Max. daN	SHEAR DEFLECT. Mm.	Code
BOBBINS TYPE A 12-25	12,5	10	M-5	10	12	2	1,5	1,5	120001
	12,5	15	M-5	10	10	3	1,5	2	120002
	12,5	20	M-5	10	8	3,5	1,5	4	120003
	16	10	M-5	12	20	1,5	2,5	1,5	120011
	16	15	M-5	12	20	3	2,5	2	120012
	16	20	M-5	12	15	4	2,5	4	120013
	16	25	M-5	12	15	5	2	5	120014
	20	8,5	M-6	16,5	40	1,5	5	1	120021
	20	15	M-6	16,5	35	4	5	2,5	120022
	20	20	M-6	16,5	30	5	5	3,5	120023
	20	25	M-6	16,5	30	5,5	4,5	4,5	120024
	20	30	M-6	16,5	25	7	4,5	4,5	120025
	25,5	10	M-6	18	80	2	8	1,5	120171
	25,5	15	M-6	18	60	3,5	8	2,5	120172
	25,5	20	M-6	18	55	4,5	8	3,5	120173
	25,5	25	M-6	18	50	6	8	4,5	120174
	25,5	30	M-6	18	50	8	8	6	120175
	25,5	10	M-8	20	80	2	8	1,5	120026
	25,5	15	M-8	20	60	3,5	8	2,5	120031
	25,5	19	M-8	20	55	4,5	8	3,5	120032
	25,5	22	M-8	20	50	5,5	8	4	120033
	25,5	25	M-8	20	50	6	8	4,5	120034
	25,5	30	M-8	20	50	8	8	6	120035
25,5	40	M-8	20	50	10	10	6	120036	

Rubber Metal antivibration mounts

AMC MECANOCAUCHO® BOBBINS TYPE A

DRAWINGS




DIMENSIONS

Type	A (mm.)	B (mm.)	C (mm.)	H (mm.)	COMPRESSION LOAD Max. daN	COMPRESSION DEFLECT. Mm.	SHEAR LOAD Max. daN	SHEAR DEFLECT. Mm.	Code
BOBBINS TYPE A 30-50	30	15	M-8	20	90	3	11	2,5	120041
	30	22	M-8	20	80	5	11	4	120042
	30	25	M-8	20	75	6,5	11	5	120186
	30	30	M-8	20	70	8	11	6	120043
	30	40	M-8	20	60	9	11	7,7	120044
	40	20	M-8	20	160	5	20	3	120193
	40	25	M-8	20	150	6	20	3,5	120194
	40	28	M-8	20	150	6	20	5,5	120195
	40	30	M-8	20	150	6	30	5,5	120196
	40	35	M-8	20	120	8	20	6,5	120197
	40	40	M-8	20	120	10	20	7,5	120198
	40	45	M-8	20	120	11	20	9	120199
	40	20	M-10	25	160	5	20	3	120051
	40	25	M-10	25	150	6	20	3,5	120191
	40	28	M-10	25	150	6	20	5,5	120052
	40	30	M-10	25	150	6	30	5,5	120192
	40	35	M-10	25	120	8	20	6,5	120053
	40	40	M-10	25	120	10	20	7,5	120054
	40	45	M-10	25	120	11	20	9	120055
	50	20	M-10	25	300	5	25	3,5	120201
	50	25	M-10	25	300	6	25	4,5	120061
	50	30	M-10	25	275	7	25	6,5	120202
	50	35	M-10	25	250	8	25	7	120062
	50	40	M-10	25	210	10	25	8	120203
	50	45	M-10	25	190	11	25	9	120063
	50	50	M-10	25	170	11	25	10,5	120204
	50	60	M-10	25	150	11	25	12	120064

Rubber Metal antivibration mounts

AMC MECANOCAUCHO® BOBBINS TYPE A

DRAWINGS

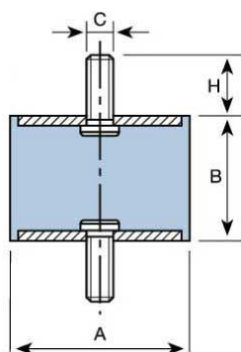


DIMENSIONS

Type	A (mm.)	B (mm.)	C (mm.)	H (mm.)	COMPRESSION LOAD Max. daN	COMPRESSION DEFLECT. Mm.	SHEAR LOAD Max. daN	SHEAR DEFLECT. Mm.	Code
BOBBINS TYPE A 60-95	60	25	M-10	25	400	6	30	4,5	120071
	60	36	M-10	25	300	9	30	7	120072
	60	45	M-10	25	250	11	30	9	120073
	60	60	M-10	25	200	12	30	10	120074
	70	35	M-10	25	450	8	35	6,5	120081
	70	50	M-10	25	350	11	35	11	120082
	70	60	M-10	25	300	12	35	13	120083
	70	70	M-10	25	300	14	35	15	120084
	75	25	M-12	30	650	7	37	5	120091
	75	40	M-12	30	500	9	37	7	120092
	75	45	M-12	30	500	10	37	9	120093
	75	55	M-12	30	450	11	37	11	120094
	80	30	M-14	35	950	7	40	5	120101
	80	40	M-14	35	600	9	40	7	120102
	80	50	M-14	35	550	10	40	8	120103
	80	55	M-14	35	550	11	40	9	120104
	80	70	M-14	35	500	13	40	15	120105
	80	75	M-14	35	450	14	40	16	120106
	95	40	M-16	45	1200	8	60	7	120111
	95	55	M-16	45	1000	11	60	8	120112
95	60	M-16	45	800	12	60	10	120113	
95	75	M-16	45	700	13	60	14	120114	

Rubber Metal antivibration mounts

AMC MECANOCAUCHO® BOBBINS TYPE A

DRAWINGS

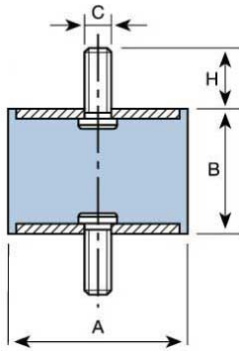

DIMENSIONS

Type	A (mm.)	B (mm.)	C (mm.)	H (mm.)	COMPRESSION LOAD Max. daN	COMPRESSION DEFLECT. Mm.	SHEAR LOAD Max. daN	SHEAR DEFLECT. Mm.	Code
BOBBINS TYPE A 105-150	105	50	M-16	45	1200	9	80	9	120121
	105	75	M-16	45	1000	13	80	14	120122
	105	100	M-16	45	800	16	80	16	120123
	120	50	M-16	45	1500	9	100	9	120131
	120	75	M-16	45	1200	13	100	14	120132
	120	100	M-16	45	1000	16	100	16	120133
	130	50	M-16	45	1600	9	120	9	120142
	130	75	M-16	45	1450	13	120	14	120143
	130	100	M-16	45	1200	16	120	16	120144
	150	50	M-20	50	1800	9	140	9	120151
	150	75	M-20	50	1650	13	140	14	120152
	150	100	M-20	50	1400	16	140	16	120153



Rubber Metal antivibration mounts

AMC MECANOCAUCHO® BOBBINS TYPE A

OPERATION AND ASSEMBLY



Its elasticity is much greater in all the directions parallel to the armatures than in the perpendicular direction. The rubber works based on compression or shear depending on the direction it is placed at installation time. This direction is made according to the use and the objective. It is therefore installed with nuts or screws depending on the model chosen, with one part attached to the fixed chassis and the other to the machine to be suspended.

ADVANTAGES



- Easy to install.
- High elasticity (particularly transversal).
- Economical.