Rubber Metal anti vibration mounts

NP ANTI VIBRATION MOUNTS

The AMC-MECANOCAUCHO® NP anti vibration mounts are composed of a metallic flange and a bush that are bondend to a high resilient rubber compound.

The AMC-MECANOCAUCHO® NP anti vibration mounts can be fitted with overload/rebound washers. This allows fail-safe installations. For this purpose we recommend using washer Ref. AMC: 608074 that has the following dimensions :76x16.5x5mm.

The flange comes with four fi xing holes and the inner bush allows upto 120 N/mm tightening torque.

TECHNICAL CHARACTERISTICS

AMC-MECANOCAUCHO® NP anti vibration mounts can be applied in mobile applications when installed with overload/rebound washers.

AMC-MECANOCAUCHO® NP anti vibration mounts are available in several rubber hardnesses to suit the p g g q load range of the application.

APPLICATIONS

AMC-MECANOCAUCHO® NP anti vibration mounts are used for the effective noise and vibration isolation in the following applications:

- Agricultural equipment
- Construction equipment machinery
- Cranes
- Forklift trucks
- Multipurpose vehicles

In order to adapt its products to the state of the art, AMC S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.

Rubber Metal anti vibration mounts

NP ANTI VIBRATION MOUNTS

DRAWINGS

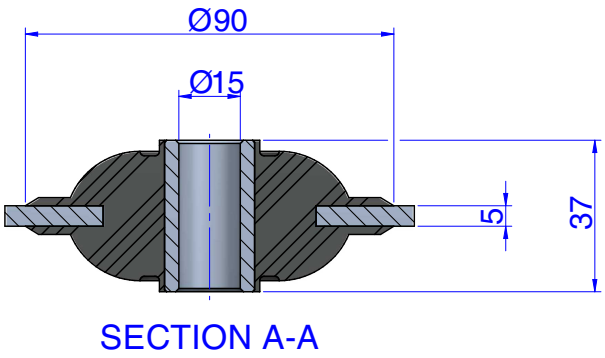

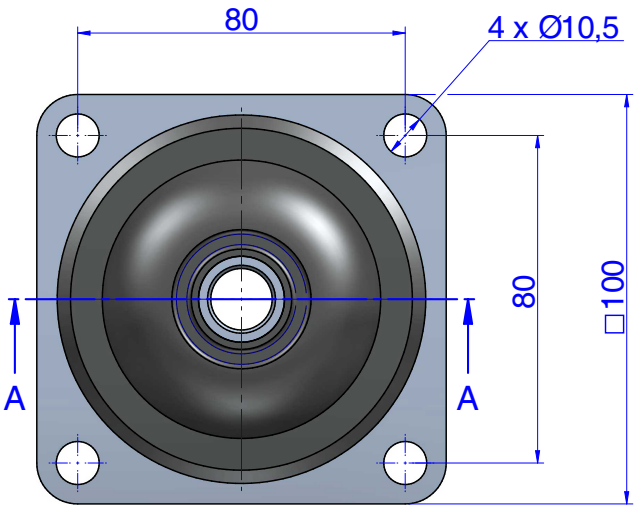

DIMENSIONS

Type	Weight (gr.)	Max. Load (kg.)	Code
50 Sh	437	250	138202
60 Sh	437	325	138201
70 Sh	437	400	138203

In order to adapt its products to the state of the art, AMC S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.

Rubber Metal anti vibration mounts

NP ANTI VIBRATION MOUNTS

Elastical properties

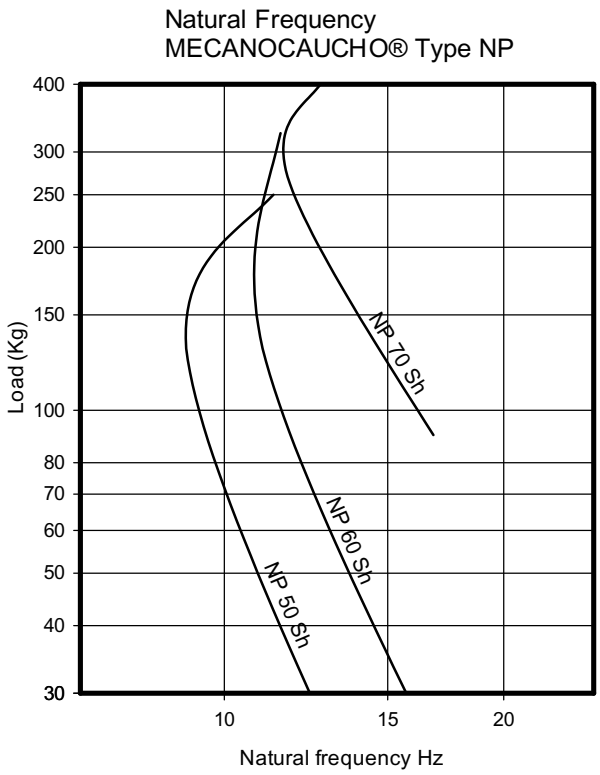

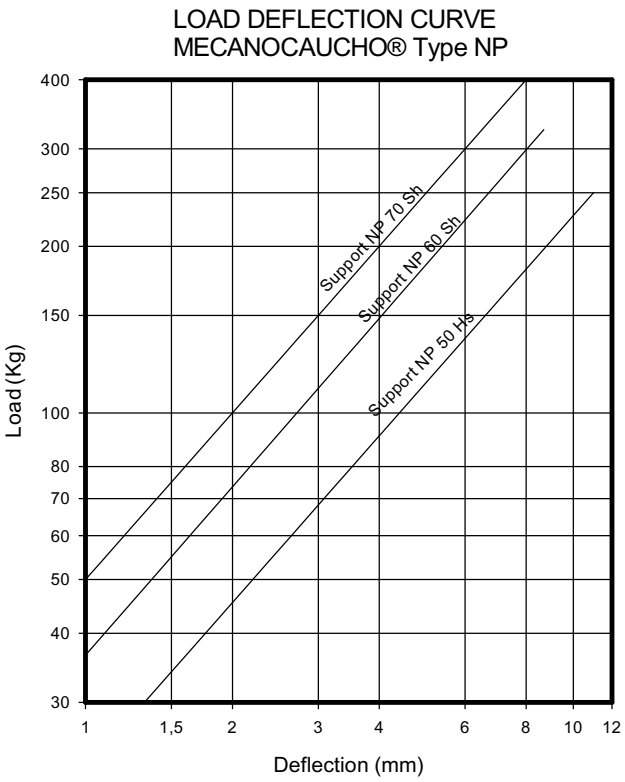

In order to adapt its products to the state of the art, AMC S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.