

Vibrabsorber 9V-SR



This range of mounts comprises:

A spring high elasticity and very low natural frequency

An incorporated levelling system

A non-slip rubber base

A spare Sylomer to isolate mid and high frequencies comes standard

TECHNICAL CHARACTERISTICS


The mounts are able to reach low natural frequencies from 3 to 5 Hz. The spring combined with sylomer® is able to provide high isolation at low and medium frequencies.

The curves are showing the deflection and natural frequencies according to the load of the spring.
Temperature working range from -30 to 70°.
Short term higher temperatures are possible.



Vibrabsorber 9V-SR

DRAWINGS

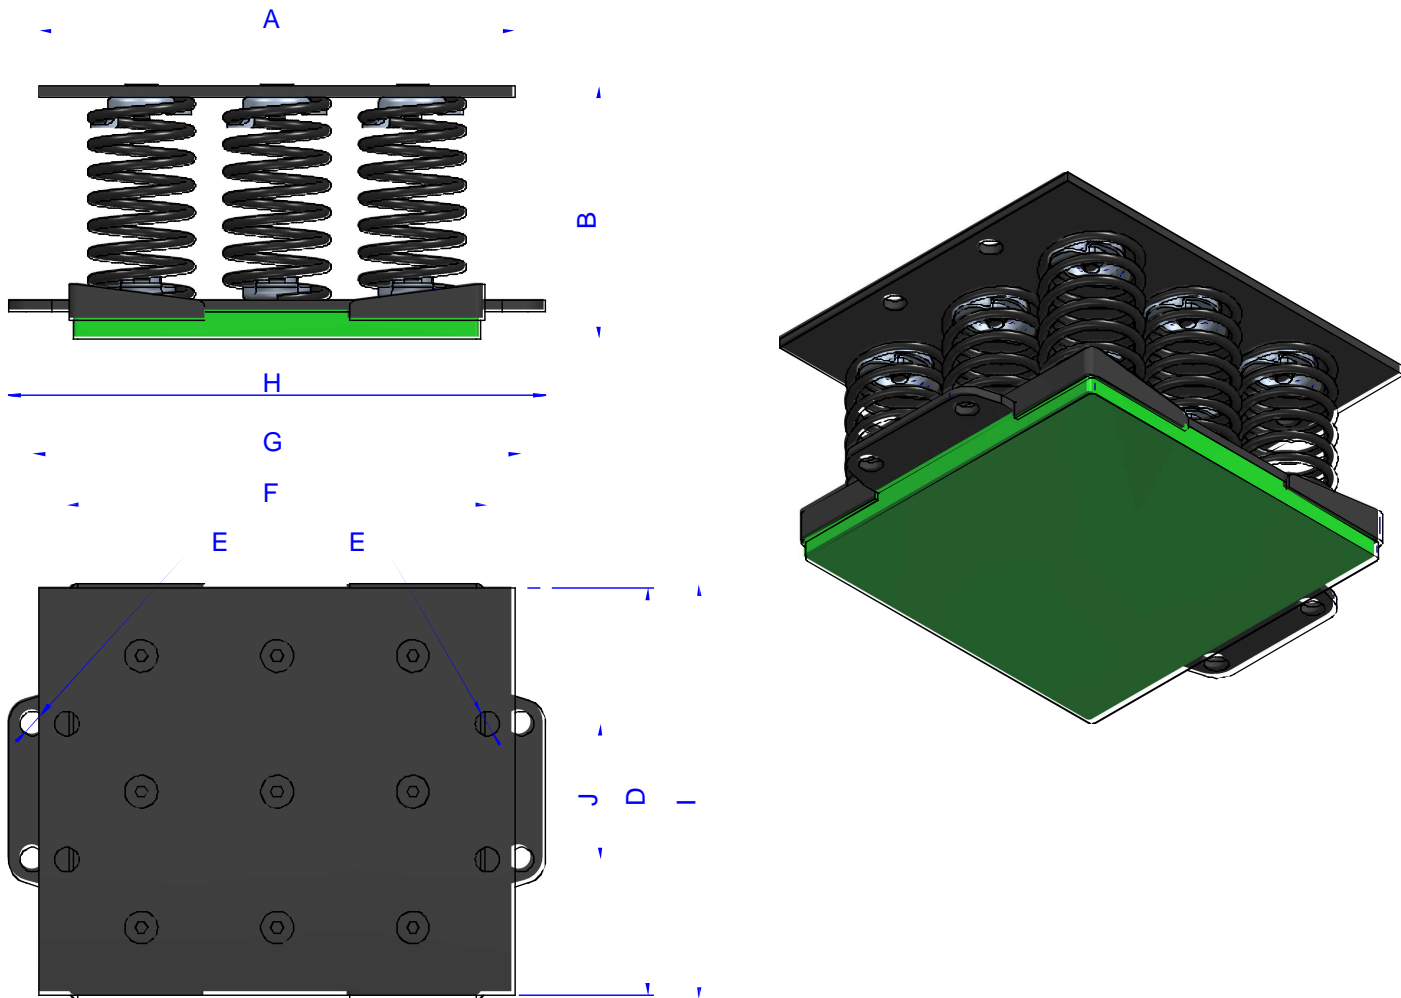

DIMENSIONS

Type	A (mm)	B (mm)	Spring color	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	J (mm)	Load (kg)	Weight (kg)	Code
9V-SR-5850	350	180	BLACK	300	18	310	360	396	306	100	5850	29.99	21111
9V-SR-7200	350	180	BLACK	300	18	310	360	396	306	100	7200	30.22	21112
9V-SR-9000	350	180	BLACK	300	18	310	360	396	306	100	9000	32.96	21113
9V-SR-10800	350	180	BLACK	300	18	310	360	396	306	100	10800	33.63	21114

Vibrabsorber 9V-SR

Elastical properties

