

Vibrabsorber

2V-SH ANTI SEISMIC MOUNTS



- A spring with high elasticity and very low natural frequency
- An incorporated levelling system
- A Sylomer pad under the mount base in order to isolate mid-high frequencies comes standard

TECHNICAL CHARACTERISTICS

The mounts are able to reach low natural frequencies from 3 to 5 Hz. The spring combined with Sylomer® is able to provide high isolation at low-medium-high frequencies.


The curves are showing the deflection and natural frequencies according to the load of the spring. Working range temperature from -30°C to +70°C. Short term higher temperatures are possible.



Vibrabsorber

2V-SH ANTI SEISMIC MOUNTS

DRAWINGS

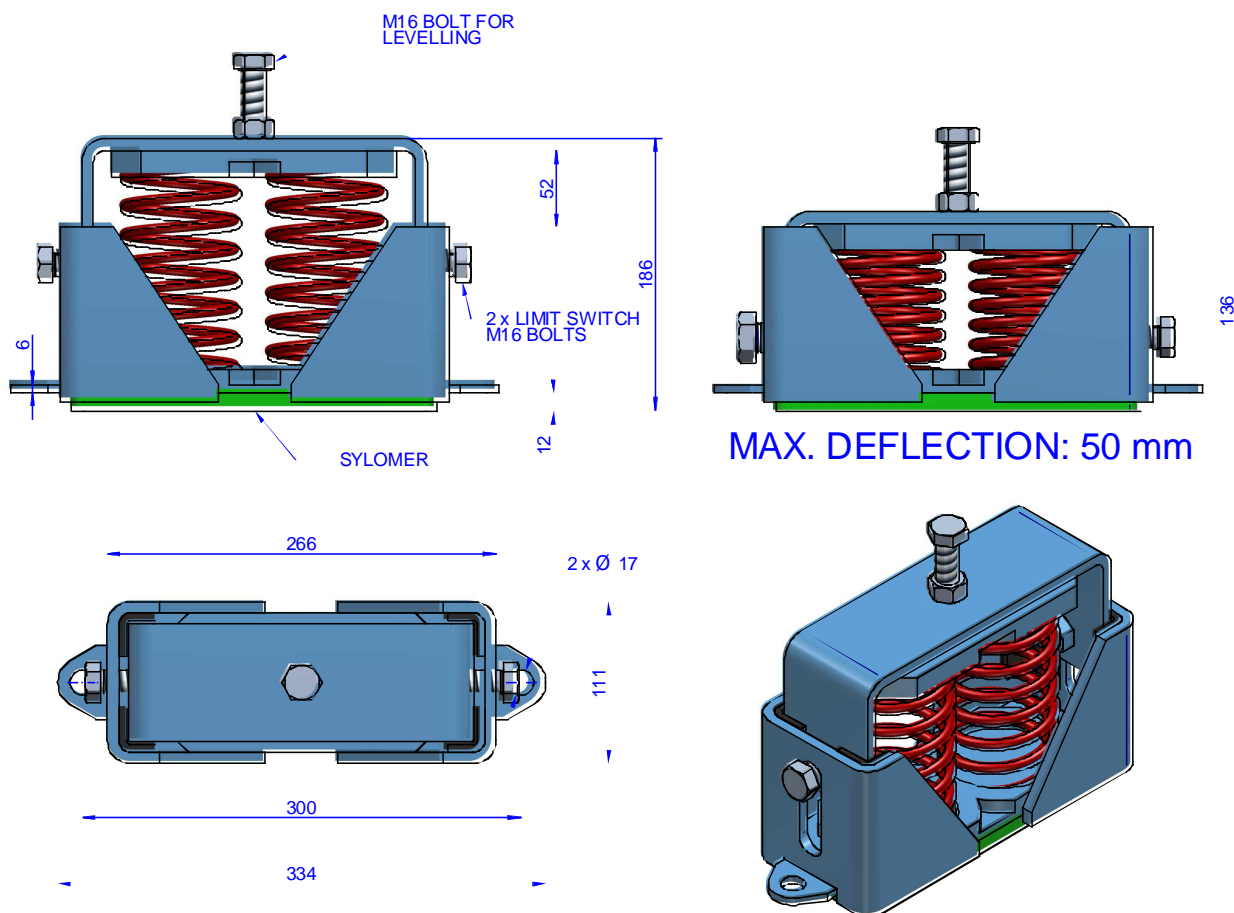

DIMENSIONS

Type	Spring color	Load (kg)	Weight (kg)	Code
2V-SH-134 ANTI SEISMIC + SYLOMER	BLUE	134	10.423	20587
2V-SH-190 ANTI SEISMIC + SYLOMER	WHITE	190	10.537	20588
2V-SH-246 ANTI SEISMIC + SYLOMER	BLACK	246	10.585	20589
2V-SH-346 ANTI SEISMIC + SYLOMER	BEIGE	346	10.765	20590
2V-SH-446 ANTI SEISMIC + SYLOMER	RED	446	11.507	20591
2V-SH-670 ANTI SEISMIC + SYLOMER	GREY	670	11.909	20592
2V-SH-892 ANTI SEISMIC + SYLOMER	GREEN	892	12.441	20593

Vibrabsorber

2V-SH ANTI SEISMIC MOUNTS

Elastical properties

