

Akustikabsorber

FD



Beige perforated PVC facing an M-1 class fireresistant absorbing polyurethane foam.

Measurements according to UNE-EN ISO 140-3 standard (December 1995)
Acoustic Isolation of Construction Materials in Laboratory Measurements.
Corresponds completely with ISO 140-3(1995) standard.
Cancels and substitutes UNE 74-040/3 (1984) standard.
Calculations according to NBCEA88.

Type	Code	SELF-ADHESIVE	Rw (dB)	Weight (kg)
FD-15 sheet	26231	-	13	1,335
FD-15 A sheet	26233	✓	13	1,335
FD-25 sheet	26232	-	11	2,085
FD-25 A sheet	26234	✓	11	2,085

TECHNICAL CHARACTERISTICS

- **Composition**
Beige perforated PVC facing an M-1 class fireresistant absorbing polyurethane foam.
- **Thicknesses**
15mm | 25mm

FORMATS

- **Sheets**
1200x1000 mm
15mm thick, 8 Sheets per box.
25mm thick, 5 Sheets per box.
- **Rolls**
Consult for roll manufacturing.

APPLICATIONS


Lining interior of soundproof cabins or vehicles, good absorption and absorbent with M-1 class fire-resistant behaviour.

Akustikabsorber FD

ACOUSTIC PROPERTIES

Transmission Loss (dB)

FD

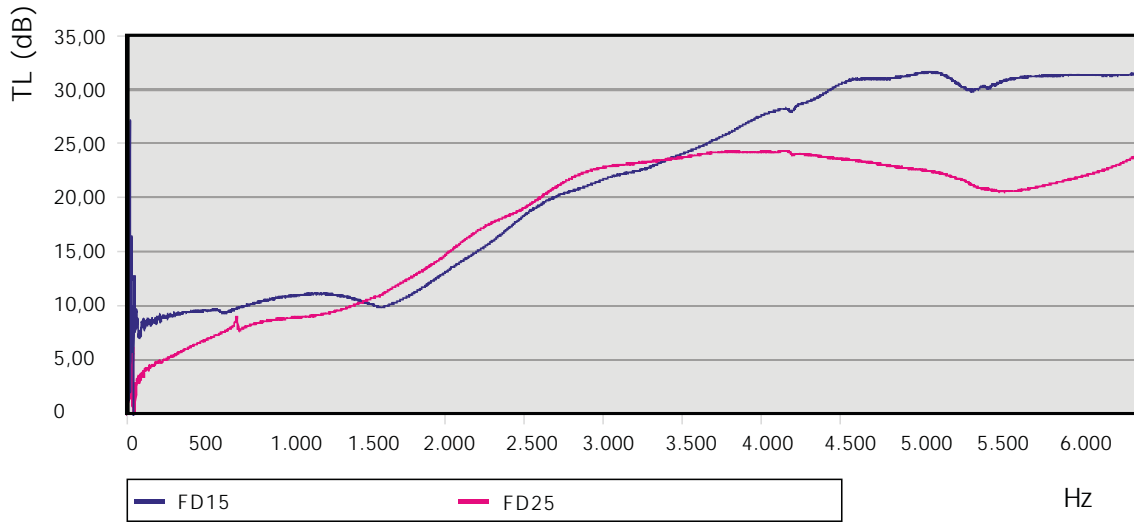

Absorption coefficient

FD

