


# Akustikabsorber

## PD BEIGE

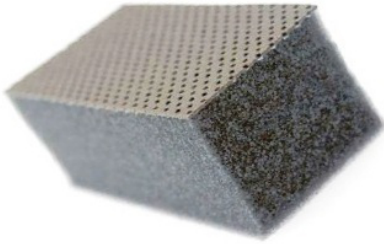

Perforated beige coloured PVC facing and absorbing polyurethane foam.

Measurements according to UNE-EN ISO 140-3 standard (December 1995)  
Acoustic Isolation of Construction Materials in Laboratory Measurements.  
Corresponds completely with ISO 140-3(1995) standard.  
Cancels and substitutes UNE 74-040/3 (1984) standard.  
Calculations according to NBCEA88.

Type	Code	SELF-ADHESIVE	Rw (dB)	Weight (kg)
PD-15 sheet	26003	-	10	1,113
PD-15 A sheet	26071	☐	10	1,113
PD-15 roll	26011	-	10	1,113
PD-15 A roll	26126	☐	10	-
PD-25 sheet	26006	-	8	1,415
PD-25 A sheet	26072	☐	8	1,415
PD-25 roll	26013	-	8	1,415
PD-25 A roll	26029	☐	8	-
PD-40 sheet	26009	-	18	1,868
PD-40 A sheet	26073	☐	18	1,868
PD-40 roll	26015	-	18	1,868
PD-40 A roll	26074	☐	18	1,868

### TECHNICAL CHARACTERISTICS

#### — Composition

Perforated beige coloured PVC facing and absorbing polyurethane foam.

#### — Thicknesses

15mm 25mm 40mm

### FORMATS

#### — Sheets

1200x1000 mm  
15mm thick, 8 Sheets per box.  
25mm thick, 5 Sheets per box.  
40mm thick, 3 Sheets per box.

#### — Rolls

15mm thick, 1500mm wide x approx. 25m long  
25mm thick, 1500mm wide x approx. 25m long  
40mm thick, 1500mm wide x approx. 20m long

### APPLICATIONS

Lining interior of soundproof cabins and vehicles, good absorption.


# Akustikabsorber

## PD BEIGE

### ACOUSTIC PROPERTIES

Transmission Loss (dB)

PD BEIGE

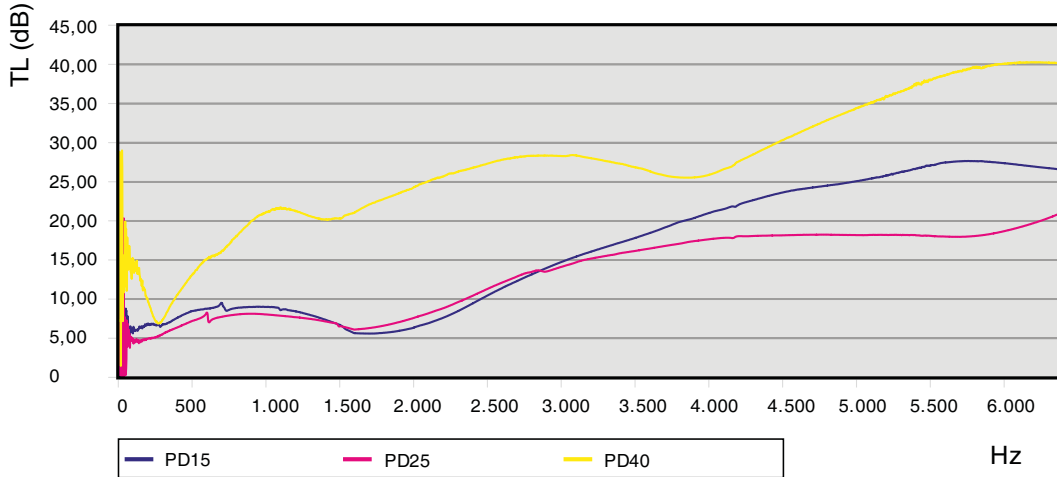

Absorption coefficient

PD BEIGE

