

# PD CREAM



Perforated white coloured PVC facing and absorbing polyurethane foam.

Measurements according to UNE-EN ISO 140-3 standard (December 1995) Acoustic Isolation of Construction Materials in Laboratory Measurements. Corresponds completely with ISO 140-3(1995) standard. Cancels and substitutes UNE 74-040/3 (1984) standard. Calculations according to NBECA88.

Type	Code	SELF-ADHESIVE	Rw (dB)	Weight (kg)
PD-15 white sheet	26075	-	10	1,113
PD-15 A white sheet	26078	✓	10	1,113
PD-15 roll white	26081	-	10	1,113
PD-15 A roll white	26084	✓	10	1,113
PD-25 white sheet	26076	-	8	1,415
PD-25 A white sheet	26079	✓	8	1,415
PD-25 roll white	26082	-	8	1,415
PD-25 A roll white	26085	✓	8	1,415
PD-40 white sheet	26077	-	18	1,868
PD-40 A white sheet	26080	✓	18	1,868
PD-40 roll white	26083	-	18	1,868
PD-40A roll white	26086	✓	18	1,868

## TECHNICAL CHARACTERISTICS

- **Composition**  
Perforated white coloured PVC facing and absorbing polyurethane foam.
- **Thicknesses**  
15mm 25mm 40mm

## FORMATS

- **Sheets**  
1200x1000 mm  
15mm thick, 8 Sheets per box.  
25mm thick, 5 Sheets per box.  
40mm thick, 3 Sheets per box.
- **Rolls**  
15mm thick, 1500mm wide x approx. 25m long  
25mm thick, 1500mm wide x approx. 25m long  
40mm thick, 1500mm wide x approx. 20m long


## APPLICATIONS

Interior lining soundproof cabins or vehicles, good absorption.

ACOUSTIC PROPERTIES

Transmission Loss (dB)

PDWHITE

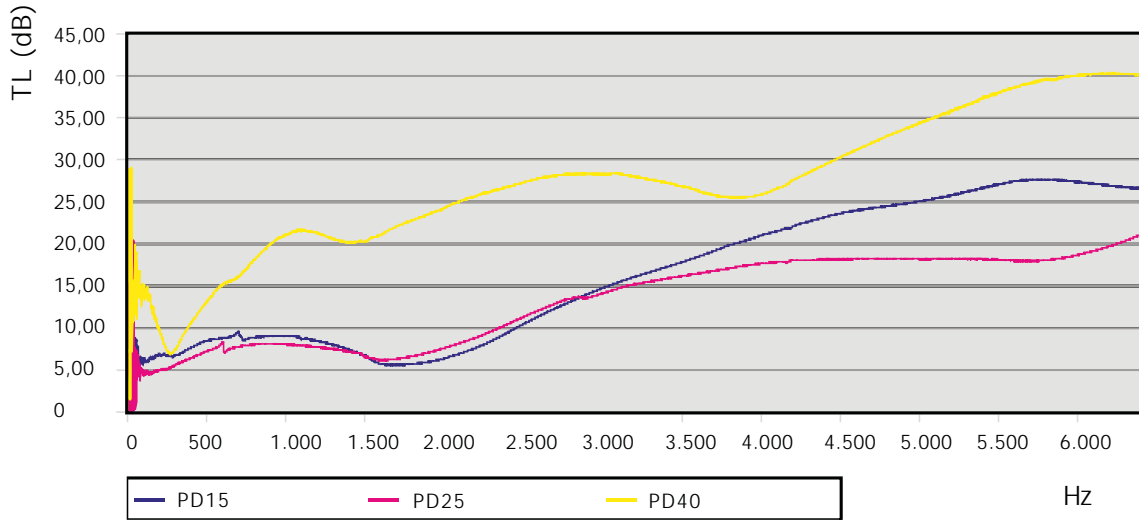

Absorption coefficient

PDWHITE

