

Akustikabsorber

PYRAMIDAL FIRE-RESISTANT

M-1 class fire-resistant melamine honeycomb foam.



Measurements according to UNE-EN ISO 140-3 standard (December 1995) Acoustic Isolation of Construction Materials in Laboratory Measurements. Corresponds completely with ISO 140-3(1995) standard. Cancels and substitutes UNE 74-040/3 (1984) standard. Calculations according to NBCEA88.

Type	Code	SELF-ADHESIVE	Rw (dB)	Weight (kg.)
PIRAMIDAL IGNÍFUGO 30 plancha	26805	-	9	-
PIRAMIDAL IGNÍFUGO 30 plancha	26807	x	9	-
PIRAMIDAL IGNÍFUGO 50 plancha	26806	x	11	-
PIRAMIDAL IGNÍFUGO 50 plancha	26808	-	11	-

TECHNICAL CHARACTERISTICS

- **Composition**
M-1 class fire-resistant melamine honeycomb foam.
- **Thicknesses**
30mm 50mm

FORMATS

- **Sheets**
1200x600 mm

APPLICATIONS


Aislante térmico, comportamiento M-1 ignífugo, muy buen absorbente acústico y aspecto decorativo

Akustikabsorber

PYRAMIDAL FIRE-RESISTANT

ACOUSTIC PROPERTIES

Transmission Loss (dB) PYRAMDAL FIRE-RESISTANT

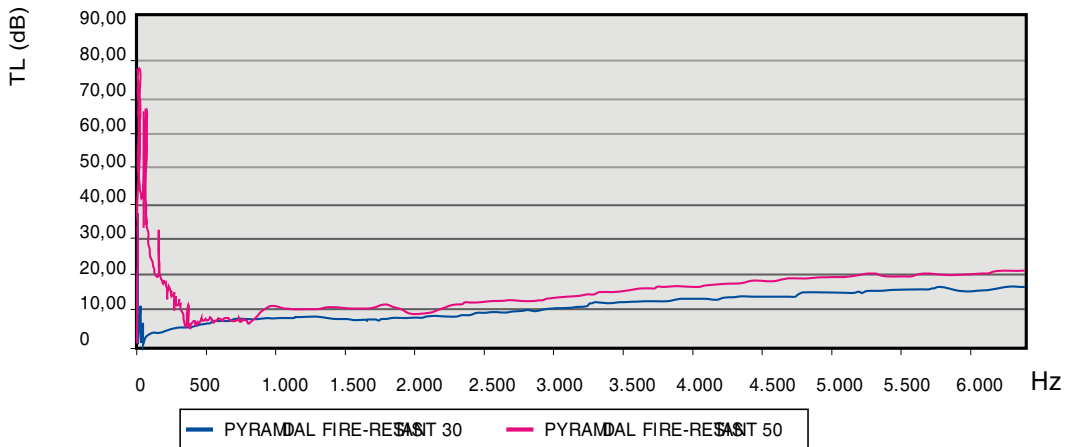

Absorption coefficient PYRAMDAL FIRE-RESISTANT

