

## SPECIFICATIONS

# AGLO D

20mm

40mm

Beige perforated PVC facing and bound polyurethane foam with a density of 150 Kg/m<sup>3</sup>.



### Overall air-borne noise isolation use

Measurements according to UNE-EN ISO 140-3 standard (December 1995) Acoustic Isolation of Construction Materials in Laboratory Measurements.  
Corresponds completely with ISO 140-3(1995) standard.  
Cancels and substitutes UNE 74-040/3 (1984) standard.  
Calculations according to NBCEA88.

DESCRIPTION	R' (dB)
AGLO D-20 ON 2mm SHEET	23
AGLO D-40 ON 2mm SHEET	23

### Composition

Beige perforated PVC facing and bound polyurethane foam with a density of 150 Kg/m<sup>3</sup>.

### Applications

Lining interior of soundproof cabins and vehicles, good absorption.

### Thicknesses

20mm 40mm

### Formats


■ 2000x1000mm Sheets.

● Consult for roll manufacturing.

DESCRIP.	FORMAT	SELF-ADHESIVE	REF.
AGLO D 150/20	■	-	28300
AGLO D A 150/20	■	Y	28302
AGLO D 150/40	■	-	28301
AGLO D A 150/40	■	Y	28303

Transmission Loss (dB)

AGLO D

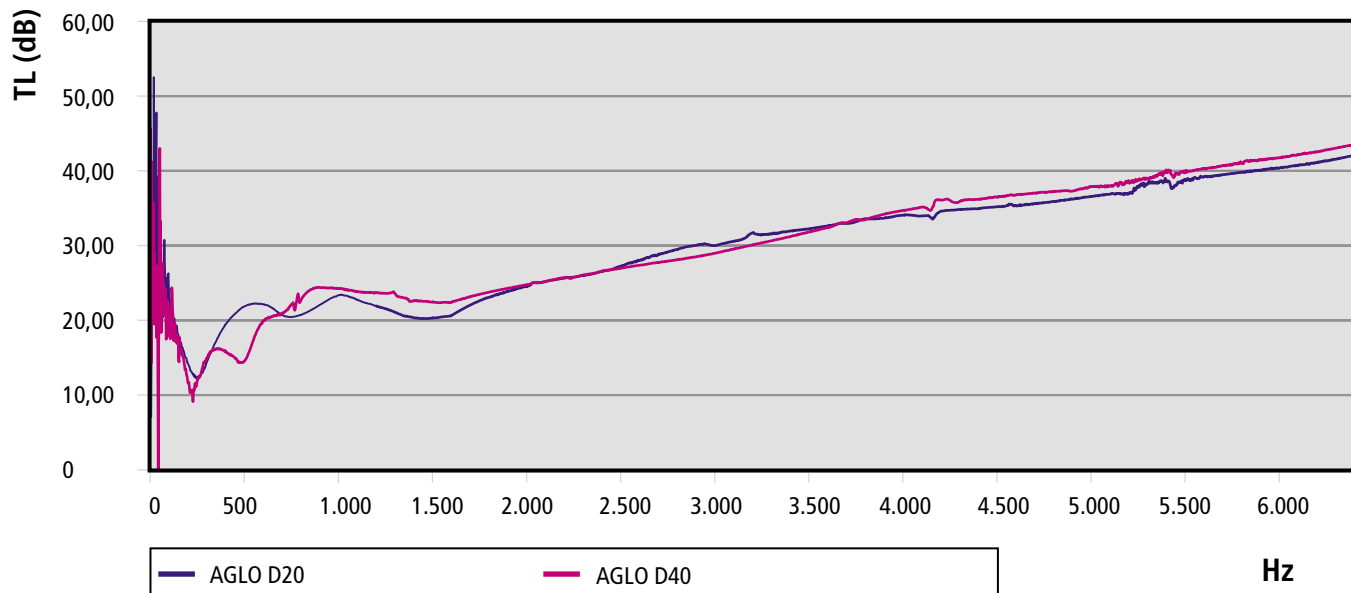

Absorption coefficient

AGLO D

