

SPECIFICATIONS

AGLO FAR

20mm

40mm

Black unwoven film and bound polyurethane foam with a density of 150 Kr/m³.



Overall air-borne noise isolation use

Measurements according to UNE-EN ISO 140-3 standard (December 1995) Acoustic Isolation of Construction Materials in Laboratory Measurements.
Corresponds completely with ISO 140-3(1995) standard.
Cancels and substitutes UNE 74-040/3 (1984) standard.
Calculations according to NBCEA88.

DESCRIPTION	R' (dB)
AGLO FAR-20 ON 2mm SHEET	21
AGLO FAR-40 ON 2mm SHEET	18

Composition

Black unwoven film and bound polyurethane foam with a density of 150 Kr/m³.

Applications

Lining interior of soundproof cabins and vehicles, good absorption.

Thicknesses

20mm 40mm

Formats


■ 2000x1000mm Sheets.

● Consult for roll manufacturing.

DESCRIP.	FORMAT	SELF-ADHESIVE	REF.
AGLO FAR 150/20	■	-	28304
AGLO FAR + AUTO 150/20	■	Y	28306
AGLO FAR 150/40	■	-	28305
AGLO FAR + AUTO 150/40	■	Y	28307

Transmission Loss (dB)

AGLO FAR

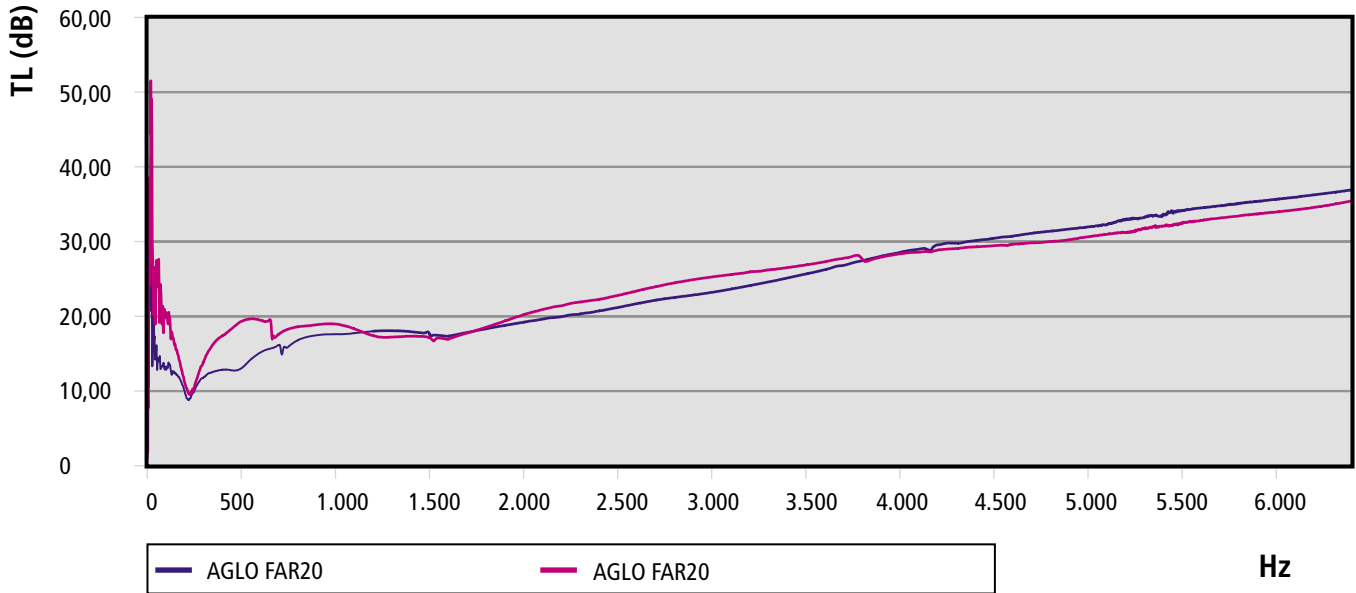

Absorption coefficient

AGLO FAR

