

## SPECIFICATIONS

# FAR

15mm

25mm

Black unwoven film and M-1 class fire-resistant absorbing polyurethane foam.



### Overall air-borne noise isolation use

Measurements according to UNE-EN ISO 140-3 standard (December 1995) Acoustic Isolation of Construction Materials in Laboratory Measurements.  
Corresponds completely with ISO 140-3(1995) standard.  
Cancels and substitutes UNE 74-040/3 (1984) standard.  
Calculations according to NBECA88.

DESCRIPTION	R' (dB)
FAR-15 ON 2mm SHEET	10
FAR-25 ON 2mm SHEET	10

### Composition

Black unwoven film and M-1 class fire-resistant absorbing polyurethane foam.

### Applications

Lining interior of soundproof cabins or vehicles, good absorption and absorbent with M-1 class fire-resistant behaviour.

### Thicknesses

15mm 25mm

### Formats


1200x1000mm Sheets.  
15mm thick, 8 Sheets per box.  
25mm thick, 5 Sheets per box.

● Consult for roll manufacturing possibilities.

DESCRIP.	FORMAT	SELF-ADHESIVE	REF.
FAR-15 sheet	■	-	26241
FAR-15 A sheet	■	Y	26242
FAR-25 sheet	■	-	26243
FAR-25 A sheet	■	Y	26244

Transmission Loss (dB)

FAR

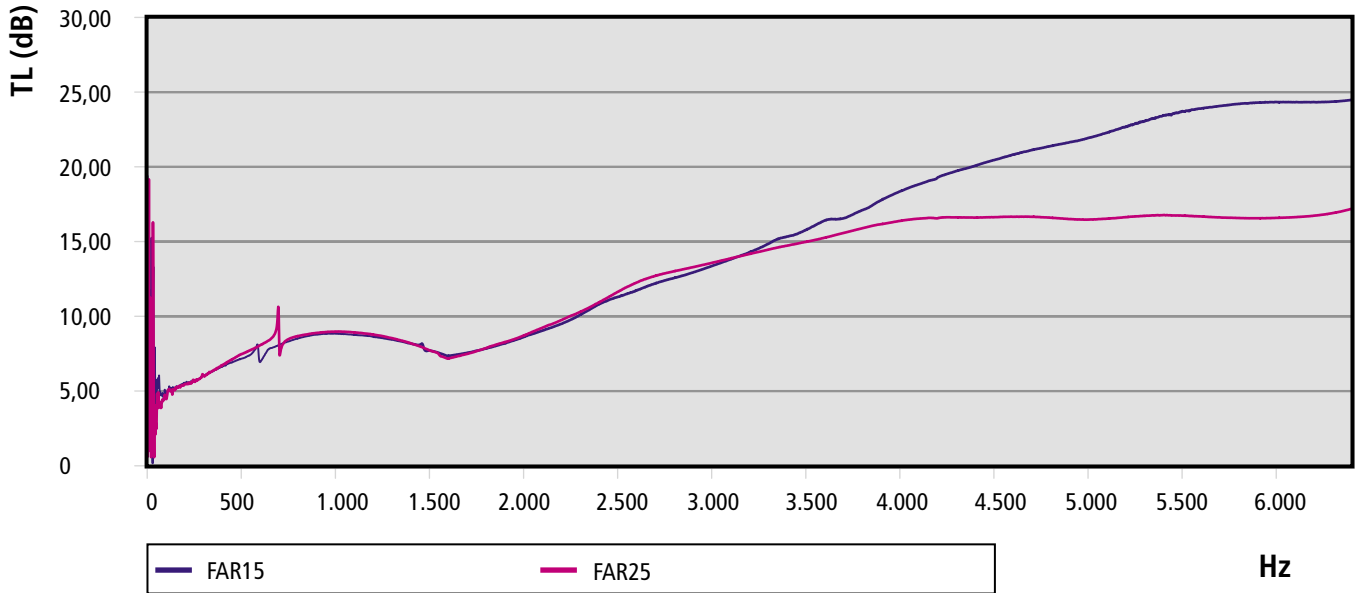

Absorption coefficient

FAR

